

Series	Type	Material	Pipe O.D. x s (mm)	Viscosity	Operating Pressure	Operating Temperature	Page
Economy Line 6	34000E-A	316/316L	33.7*2.0	< 150 cSt	max. 6bar @ 20°C	-40ë 100°C	2
	34000E-K	"	"	"	"	"	3
	23614E-A	316/316L	53.0 x 1.5	< 600 cSt	max. 6bar @ 20°C	-40...100°C	4
	23614E-K	"	"	"	"	"	5
	Pressure Temperature Rating for Economy Line 6						6
	PED diagram for 26614E and fluid group 1						7
	Preparing indicator						8
	Mounting specification for switches and transmitters no. 20010501						9

Information to the Economy program

If you do not find a solution for your application concerning pressure, temperature, connections or others, please have a look to our other VLI series, like Smart Line, Standard, Power, Petro or Top of tank (www.weka-ag.ch) or contact your local Weka representative.

Standard delivery time for the Economy program is 5 to 10 working days, starting from receipt of technical and commercial confirmed order.
Delivery conditions according to "General conditions of contract for the supply of plant and machinery" VSM 2016.

Shipbuilding approvals for
ABS, BV, DNV, GL, LRS, RINA, RMRoS
can be downloaded under www.weka-ag.ch > support > approvals (type 34000ë or 23614ë)

Because of the NBR float being used for all Economy units it is not possible to fulfil the requirements of explosion proof equipment (ATEX, IECEx, EAC Ex).

According the assessment of PED (2014/68/EU) the VLIs are classified to article 4.3, which means no CE marking and no material certificate 3.1 necessary.
For type 23614E please consult the diagram 2 on page no. 7 to determine maximum possible length of the unit.

Important note:


The complete economy line can only be ordered with the specifications mentioned in the data sheets.
There are NO alterations and NO special executions possible!

Main parameters:

- Loose flanges only
- NBR floats only
- Density 0,55 ë 1,1 (34000E); 0,75 ë 1,3 (23614E)
- Temperature -40°C ë +100°C
- PN6 (6bar@20°C)

Economy Line 6

Type: 34000E-A

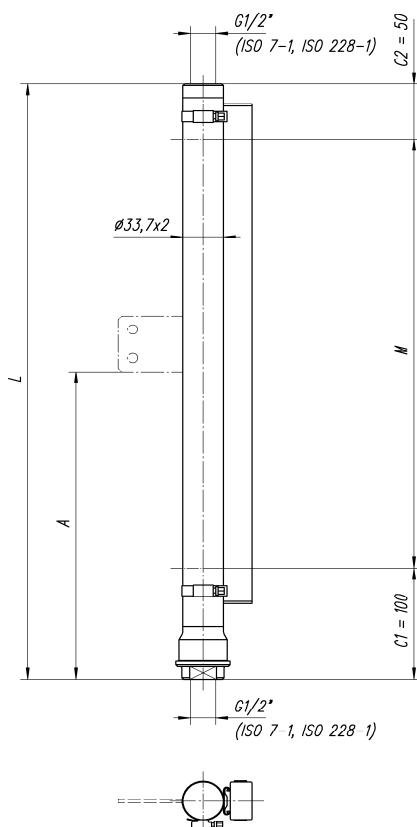

Purchase Order Data:

Company:
Purchase order no.:
Project:
Quantity:

Tag no.:	

Operating Conditions

Fluid: *1)

Viscosity of liquid:

Density:

Operating pressure:

Design pressure:

Operating temperature:

Design temperature:

max. 150cSt @ operating temperature range

0.55 ÷ 1.1g/cm³

max. 6bar(g) @ 20°C *2)

"

-40°C up to max. 100°C *2)

"

g/cm³:

bar(g):

bar(g):

°C:

°C:

Design and Materials:

Float chamber:

Float:

standard execution:

316/316L

NBR foam

0.55 ÷ 0.70g/cm³

0.71 ÷ 0.85g/cm³

0.86 ÷ 0.95g/cm³

0.96 ÷ 1.10g/cm³

38578/0.6

38578/0.8

38578/0.9

41622/1.0

Gaskets:

fibre compound Aramid/NBR

pure PTFE non reinforced

Closing plug with gasket G1" ISO 228-1, with connecting thread:

80338

85628

Standard

Standard

Indication Rail:

Polycarbonate, IP 65, flaps red/silver, shrink clip fixation

Increased fixation for indication rail (top and bottom)

Heavy fixation for indication rail (vibrations, shock etc.)

34837/10

34837/20

20050105/1

Standard

Indication distance "M":

M ≤ 3000mm (L = M + 150mm)

M = mm:

Process connections:

Female G1/2" (ISO 7-1 / ISO 228-1)

Top cap and bottom plugged

Standard

- all indicated dimensions in [mm]
- position of fixation bracket shown at time of delivery (180° opposite of indication rail)

Accessories:

Fixation bracket, moveable no. 45143-1:
(recommended for L > 2000mm)

dimension "A", mm:

Magnetic switch *3):

type 37557/3

type 37589

type 31130-NN/3

type 31160-NN/3

SPST, 100V/0.5A/10VA/10W

SPST, 100V/0.5A/10VA/10W

SPST, 250V/1A/220VA/160W

SPDT, 250V/1A/60VA/40W

3m cable

plug

3m cable

3m cable

Qty:

Qty:

Qty:

Qty:

Transmitter (without shipbuilding approval) *3):

type 29710-010-10

type 31967-010-10

resistant output

4 ÷ 20mA output

10mm resolution

10mm resolution

5m cable

5m cable

PED (2014/68/EU) assessment:

Fluid group 1 (dangerous or unknown)

Fluid group 2 (all others)

= article 4.3 (no marking, no material certificate)

= article 4.3 (no marking, no material certificate)

*2) Notice max. pressure-temperature rating!

Test pressure will be specified according to WEKA specification "Pressure- and Temperature Information"

*3) Notice mounting specification for switches and transmitters no. 20010501


*1) Some recommended liquids for viscosity less than 150cSt over the specified operating temperature range:

- aviation gas
- diesel fuel
- fuel oil
- hydraulic oil
- kerosene
- motor oil
- naphta
- regular premium gasoline
- methanol
- ethanol
- water (no drinking water)

Because of the float there is no
Ex protection certificate available!

Economy Line 6

Type: 34000E-K

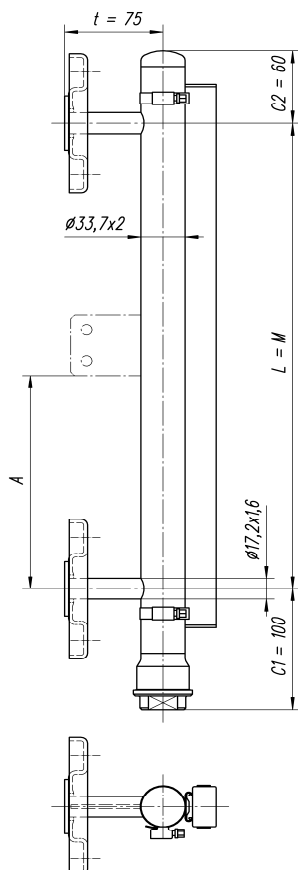

Purchase Order Data:

Company:
Purchase order no.:
Project:
Quantity:

Tag no.:	

Operating Conditions

Fluid: *1)

Viscosity of liquid:

Density:

Operating pressure:

Design pressure:

Operating temperature:

Design temperature:

max. 150cSt @ operating temperature range

0.55 ÷ 1.1g/cm³

max. 6bar(g) @ 20°C *2)

"

-40°C up to max. 100°C *2)

"

g/cm³:

bar(g):

bar(g):

°C:

°C:

Design and Materials:

Float chamber:

Float:

standard execution:

316/316L

NBR foam

0.55 ÷ 0.70g/cm³

0.71 ÷ 0.85g/cm³

0.86 ÷ 0.95g/cm³

0.96 ÷ 1.10g/cm³

38578/0.6

38578/0.8

38578/0.9

41622/1.0

Gaskets:

fibre compound Aramid/NBR

pure PTFE non reinforced

80338

85628

Standard

Standard

Closing plug with gasket G1" ISO 228-1

revised 25.11.2010 / Ot

Indication Rail:

Polycarbonate, IP 65, flaps red/silver, shrink clip fixation

Increased fixation for indication rail (top and bottom)

Heavy fixation for indication rail (vibrations, shock etc.)

34837/10

34837/20

20050105/1

Standard

Standard

Indication distance "M":

M = L ≤ 3000mm

M = mm:

Process connections:

EN / DIN - pressed lap-joint flanges PN10 (304/304L)

- connecting dim. acc. to EN 1092-1/02 A/PN 10 / DIN 2642/PN10

- collars, sealing surface EN 1092-1/32 B1 / DIN 2526 form C, 316L

DN15:

DN20:

DN25:

ISO / ANSI - loose flanges, PN20 / class150 (304/304L)

- connecting dim. acc. to ISO-DIS7005-1.2 / ANSI/ASME B16.5

- collars, raised sealing surface SF (smooth finish), 316L

DN15 / 1/2":

DN 20 / 3/4":

DN 25 / 1":

Accessories:

Fixation bracket, moveable no. 45143-1:

(recommended for L > 2000mm)

dimension "A", mm:

Magnetic switch *3):

type 37557/3

SPST, 100V/0.5A/10VA/10W

3m cable

Qty:

type 37589

SPST, 100V/0.5A/10VA/10W

plug

Qty:

type 31130-NN/3

SPST, 250V/1A/220VA/160W

3m cable

Qty:

type 31160-NN/3

SPDT, 250V/1A/60VA/40W

3m cable

Qty:

Transmitter (without shipbuilding approval) *3):

type 29710-010-10

resistant output

10mm resolution

5m cable

type 31967-010-10

4÷ 20mA output

10mm resolution

5m cable

PED (2014/68/EU) assessment:

Fluid group 1 (dangerous or unknown)

= article 4.3

(no marking, no material certificate)

Fluid group 2 (all others)

= article 4.3

(no marking, no material certificate)

*2) Notice max. pressure-temperature rating!

Test pressure will be specified according to WEKA specification "Pressure- and Temperature Information"

*3) Notice mounting specification for switches and transmitters no. 20010501

- all indicated dimensions in [mm]
- position of fixation bracket shown at time of delivery (180° opposite of and 180° opposite indication rail)


*1) Some recommended liquids for viscosity less than 150cSt over the specified operating temperature range:

- aviation gas
- diesel fuel
- fuel oil
- hydraulic oil
- kerosene
- motor oil
- naphta
- regular premium gasoline
- methanol
- ethanol
- water (no drinking water)

Because of the float there is no Ex protection certificate available!

Economy Line 6

Type: 23614E-A

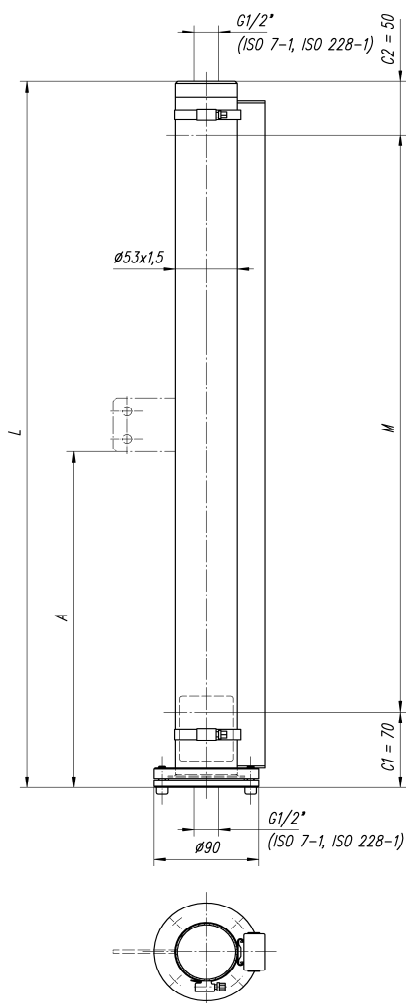

Purchase Order Data:

Company:
Purchase order no.:
Project:
Quantity:

Tag no.:	

Operating Conditions

Fluid: *1)

Viscosity of liquid:

Density:

Operating pressure:

Design pressure:

Operating temperature:

Design temperature:

max. 600cSt @ operating temperature range

0.75 ... 1.3g/cm³

max. 6bar(g) @ 20°C *2)

"

-40°C up to max. 100°C *2)

"

g/cm³:

bar(g):

bar(g):

°C:

°C:

Design and Materials:

Float chamber:

Float:

standard execution:

316/316L

NBR foam 0.75 ÷ 0.90g/cm³

0.91 ÷ 1.00g/cm³

1.01 ÷ 1.30g/cm³

39525/0.8

39525/1.0

39525/1.2

Screws and nuts:

Gaskets:

A2-70, ISO 3506

fibre compound Aramid/NBR

PTFE, racked

80361

80426

Standard

Indication Rail:

Polycarbonate, IP 65, flaps red/silver, shrink clip fixation

Increased fixation for indication rail (top and bottom)

Heavy fixation for indication rail (vibrations, shock etc.)

34837/10

34837/20

20050105/1

Standard

Indication distance "M":

M ≤ 3000mm (L = M + 120mm)

M = mm:

Process connections:

female G1/2" (ISO 7-1 / ISO 228-1)

Top cap and bottom flanged

Standard

- all indicated dimensions in [mm]
- position of fixation bracket shown at time of delivery (180° opposite of indication rail)

*1) Some recommended liquids for viscosity less than 600cSt over the specified operating temperature range:

- aviation gas
- diesel fuel
- fuel oil
- hydraulic oil
- kerosene
- motor oil
- naphta
- regular premium gasoline
- methanol
- ethanol
- water (no drinking water)

Because of the float there is no Ex protection certificate available!

Accessories:

Fixation bracket, moveable no. 45143-2:
(recommended for L > 2000mm)

dimension "A", mm:

Magnetic switch *3):

type 37557/3

type 37589

type 31130-NN/3

type 31160-NN/3

SPST, 100V/0.5A/10VA/10W

SPST, 100V/0.5A/10VA/10W

SPST, 250V/1A/220VA/160W

SPDT, 250V/1A/60VA/40W

3m cable

plug

3m cable

3m cable

Qty:

Qty:

Qty:

Qty:

Transmitter (without shipbuilding approval) *3):

type 29710-010-10

type 31967-010-10

resistant output

4 ÷ 20mA output

10mm resolution

10mm resolution

5m cable

5m cable

PED (2014/68/EU) assessment:

Fluid group 1 (dangerous or unknown) = article 4.3 s. dia. 2 for max. length M (no marking)

Fluid group 2 (all others) = article 4.3 (no marking, no material certificate)


*2) Notice max. pressure-temperature rating!

Test pressure will be specified according to WEKA specification "Pressure- and Temperature Information"

*3) Notice mounting specification for switches and transmitters no. 20010501

Economy Line 6

Type: 23614E-K

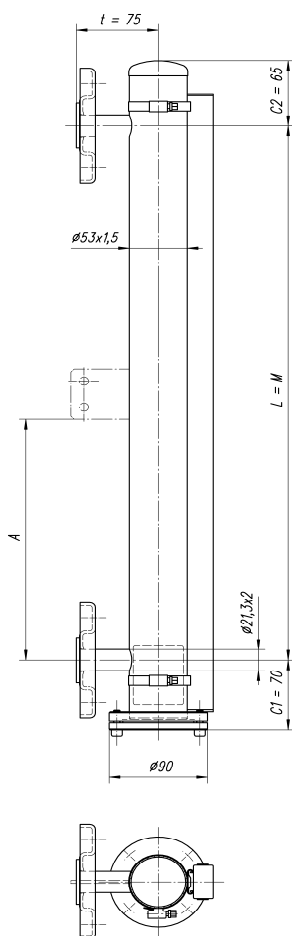

Purchase Order Data:

Company:
Purchase order no.:
Project:
Quantity:

Tag no.:	

Operating Conditions

Fluid: *1)

Viscosity of liquid:

Density:

Operating pressure:

Design pressure:

Operating temperature:

Design temperature:

max. 600cSt @ operating temperature range

0.75 ... 1.3g/cm³

max. 6bar(g) @ 20°C *2)

"

-40°C up to max. 100°C *2)

"

g/cm³:

bar(g):

bar(g):

°C:

°C:

Design and Materials:

Float chamber:

Float:

standard execution:

316/316L

NBR foam 0.75 ÷ 0.90g/cm³

0.91 ÷ 1.00g/cm³

1.01 ÷ 1.30g/cm³

39525/0.8

39525/1.0

39525/1.2

Screws and nuts:

A2-70, ISO 3506

Gaskets:

fibre compound Aramid/NBR

PTFE, racked

80361

80426

Standard

Indication Rail:

Polycarbonate, IP 65, flaps red/silver, shrink clip fixation

Increased fixation for indication rail (top and bottom)

Heavy fixation for indication rail (vibrations, shock etc.)

34837/10

34837/20

20050105/1

Standard

Indication distance "M":

M = L ≤ 3000mm

M = mm:

Process connections:

EN / DIN - pressed lap-joint flanges PN10 (304/304L)

- connecting dim. acc. to EN 1092-1/02 A/PN 10 / DIN 2642/PN10

- collars, sealing surface EN 1092-1/32 B1 / DIN 2526 form C, 316L

DN15:

DN20:

DN25:

ISO / ANSI - loose flanges, PN20 / class150 (304/304L)

- connecting dim. acc. to ISO-DIS7005-1.2 / ANSI/ASME B16.5

- collars, raised sealing surface SF (smooth finish), 316L

DN15 / 1/2":

DN 20 / 3/4":

DN 25 / 1":

Accessories:

Fixation bracket, moveable no. 45143-2:
(recommended for L > 2000mm)

dimension "A", mm:

Magnetic switch *3):

type 37557/3

SPST, 100V/0.5A/10VA/10W

3m cable

Qty:

type 37589

SPST, 100V/0.5A/10VA/10W

plug

Qty:

type 31130-NN/3

SPST, 250V/1A/220VA/160W

3m cable

Qty:

type 31160-NN/3

SPDT, 250V/1A/60VA/40W

3m cable

Qty:

Transmitter (without shipbuilding approval) *3):

type 29710-010-10

resistant output

10mm resolution

5m cable

type 31967-010-10

4÷ 20mA output

10mm resolution

5m cable

PED (2014/68/EU) assessment:

Fluid group 1 (dangerous or unknown) = article 4.3 s. dia. 2 for max. length M (no marking)

Fluid group 2 (all others) = article 4.3 (no marking, no material certificate)

*2) Notice max. pressure-temperature rating!

Test pressure will be specified according to WEKA specification "Pressure- and Temperature Information"

*3) Notice mounting specification for switches and transmitters no. 20010501

- all indicated dimensions in [mm]
- position of fixation bracket shown at time of delivery (180° opposite of and 180° opposite indication rail)

*1) Some recommended liquids for viscosity less than 600cSt over the specified operating temperature range:


- aviation gas
- diesel fuel
- fuel oil
- hydraulic oil
- kerosene
- motor oil
- naphta
- regular premium gasoline
- methanol
- ethanol
- water (no drinking water)

Because of the float there is no Ex protection certificate available!


Max allowed pressure-temperature rating

-6-

VLi EconomyLine 6, all types 34000E and 23614E
max. 6bar(g) @ 20°C, up to max. 100°C
for VLi bypass float chambers in ss 316/316L
and loose flanges DN15, DN20, DN25

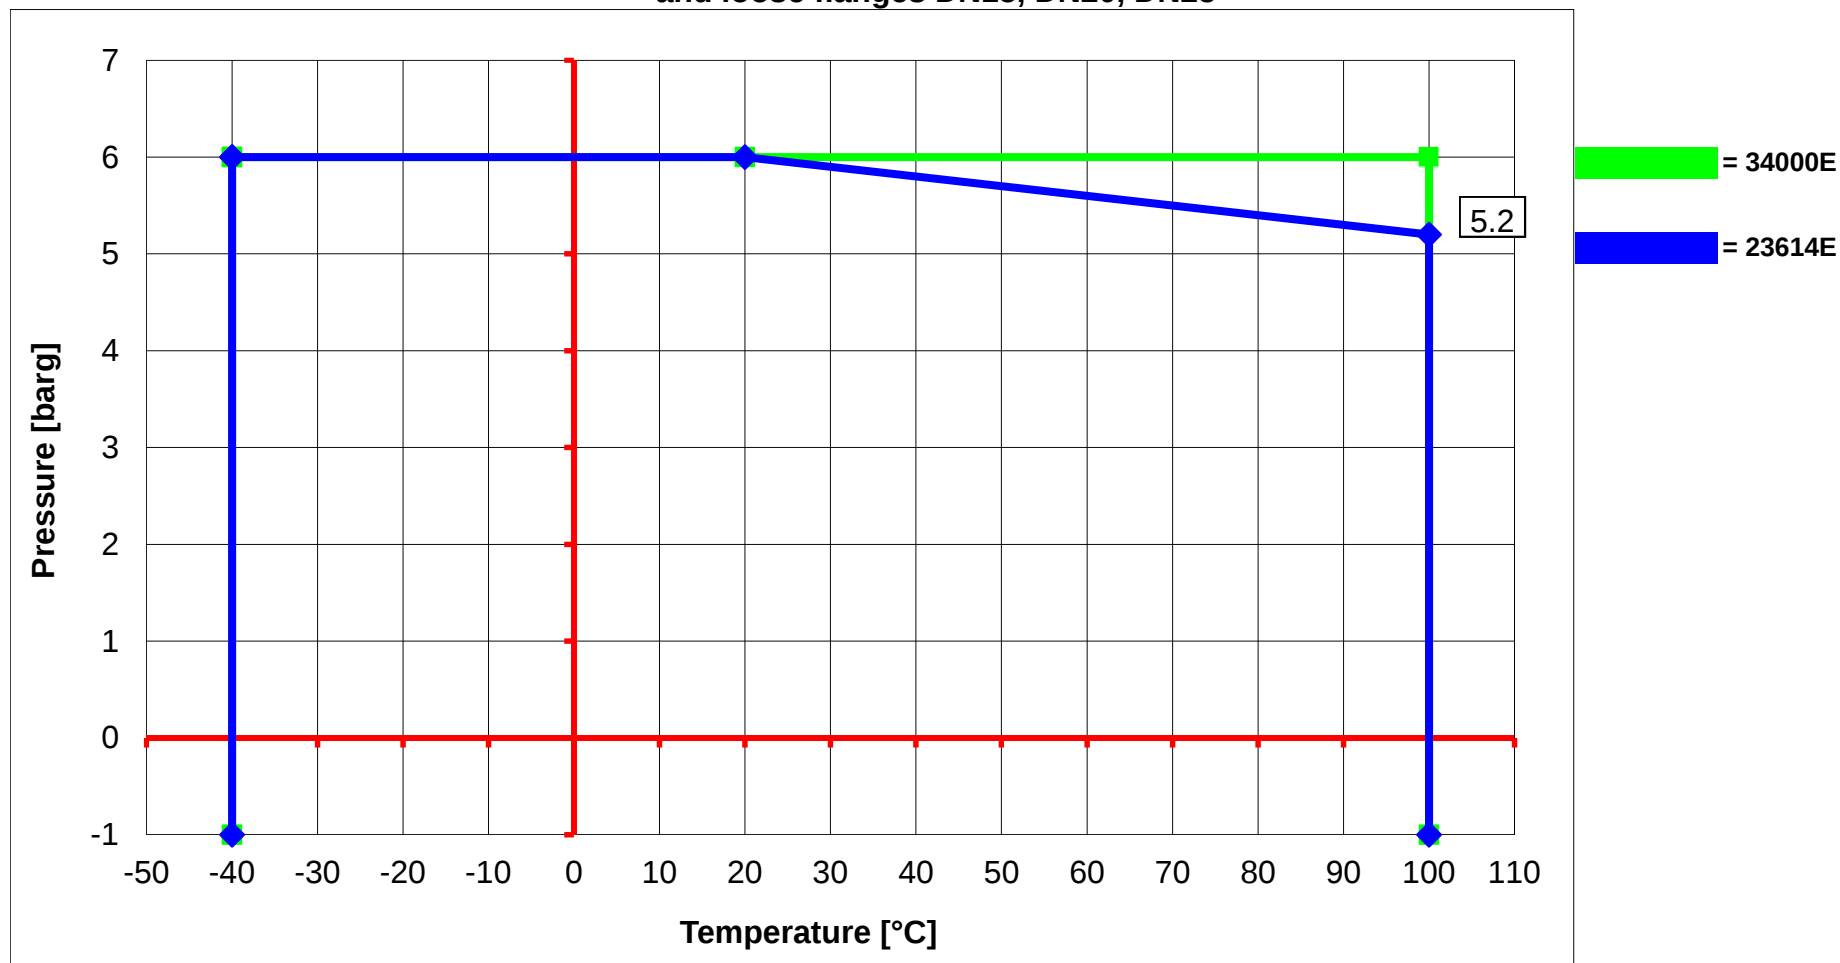

**PED (2014/68/EU) conformity
to article 4.3 for VLI type 23614E depends on
fluid group 1, indication length M and pressure PS**

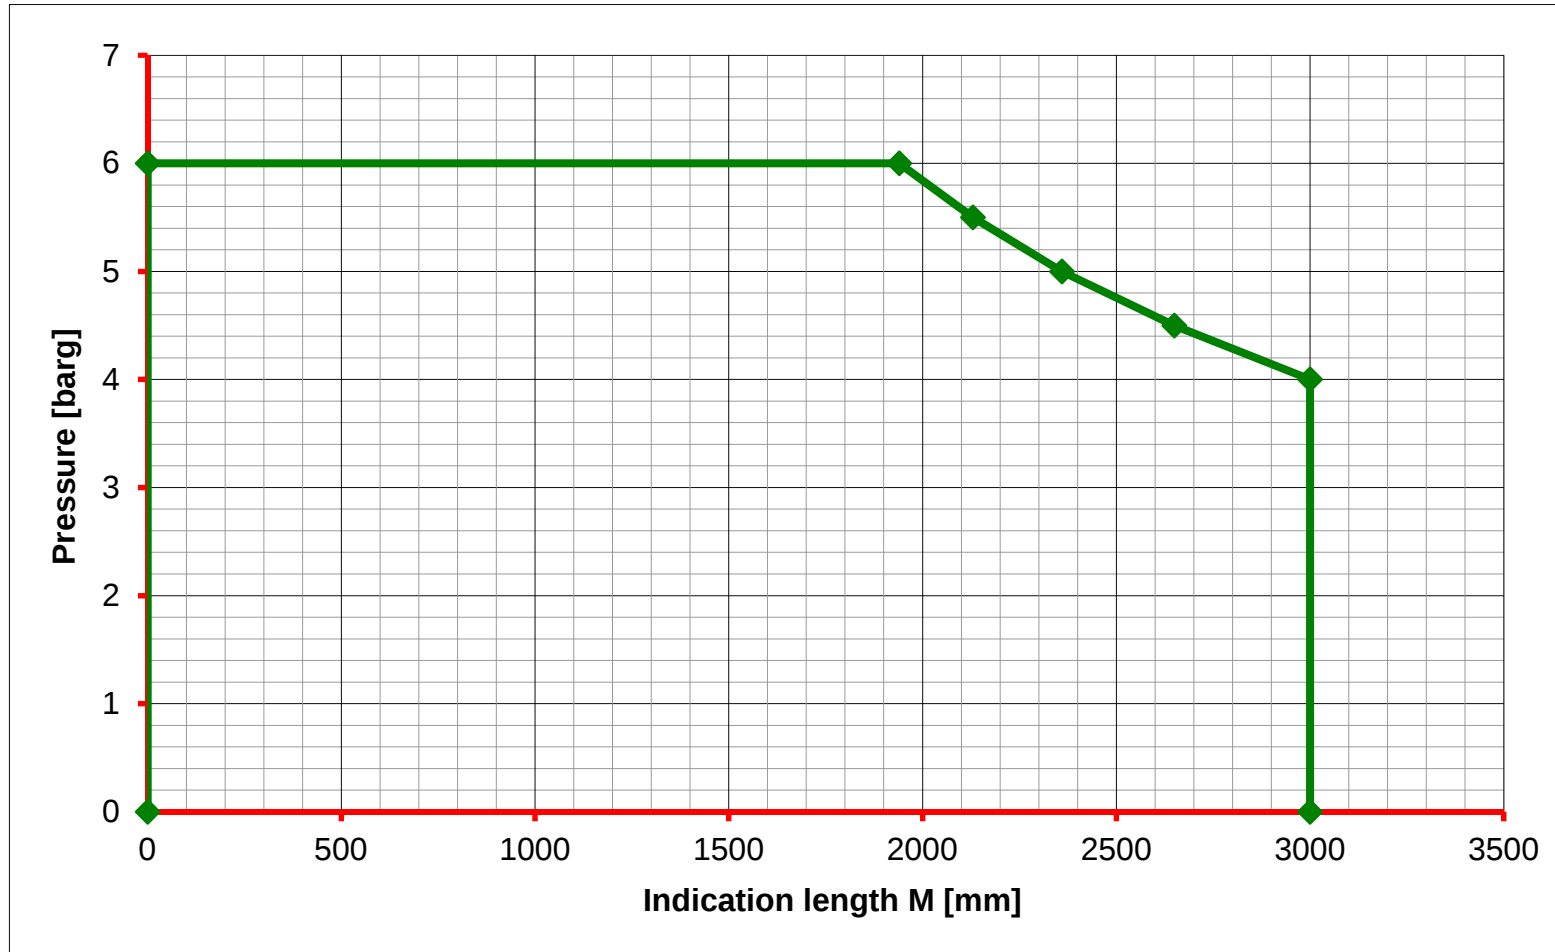



Because there is no possibility to fix the float inside the float chamber the float is delivered in a cardboard box attached to the side of the Visual Level Indicator (VLI). Before setting to work you should insert the float into the float chamber and make sure the unit is working satisfactorily.

For the float installation you need two tools:


- a) a side cutter or something similar
- b) for type 34000E a open-end wrench size 27mm
for type 23614E a hexagon allen-type wrench 5mm

1. Cut the cable tie and unfix the cardboard box with the float.

2. Open the cardboard box both ends and unpack the float.



3. Open the float chamber of the VLI at the lower end (the type label and the label beside the indication rail shows the upright position),
 - for type 34000E by unscrewing the plug.
 - for type 23614E by unscrewing the 4 hexagon screw and removing the service flange.

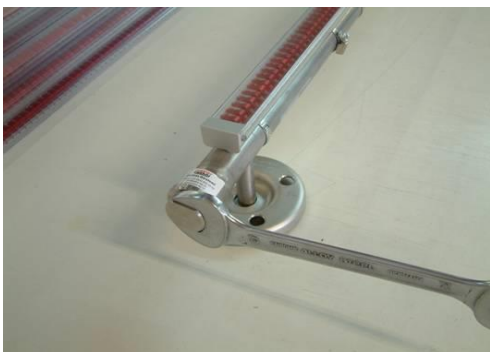



4. Insert the float into the float chamber with the "TOP"- marking first.
5. Close the float chamber again. Take care of the gaskets and the sealing surfaces.
 - Tighten torque of 34000E G1" plug
 - for Aramid/NBR- gaskets :
 - for PTFE- gaskets :
 - Tighten torque of 23614E lower cover
 - for Aramid/NBR- gaskets : 0.73 ÷ 3.06Nm
 - for PTFE- gaskets : 2.62 ÷ 3.06Nm



After the first filling the float will turn into the right direction to activate the indication rail.

Mounting specification for switches and transmitters all types

34000E

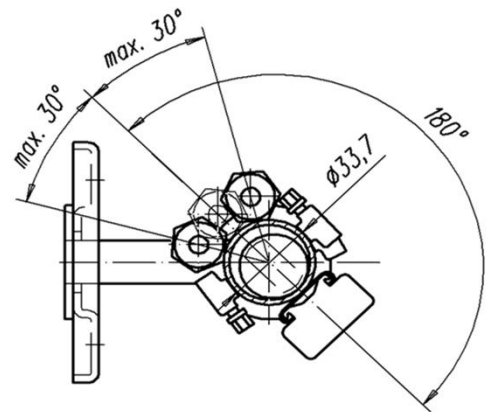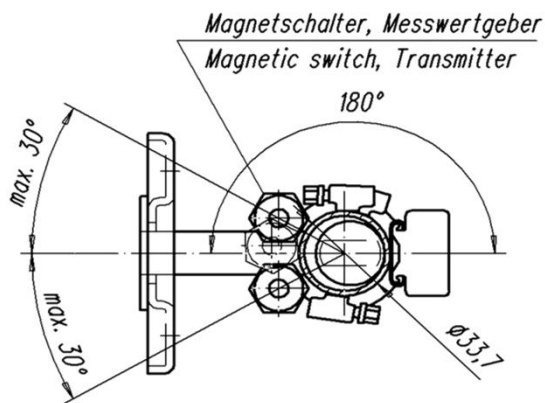

23614E

