



Control and shut-off valves

Stainless Steel Needle Valves

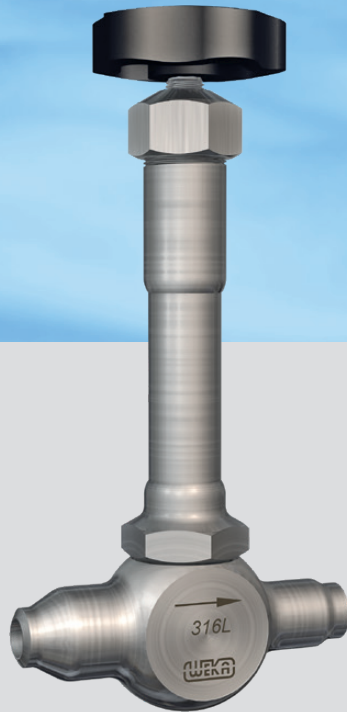

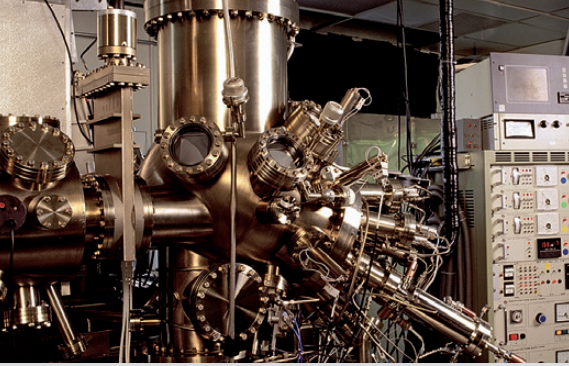

Stainless Steel Needle Valves: high reliability thanks to high quality

WEKA Stainless Steel Valves are based on know-how meticulously acquired over years of development and manufacturing of critical stainless steel components for industry and science. WEKA constantly works with customers to develop new solutions for special applications and process requirements. Our technological strength is the result from our wide experience for applications in specialised fields.

WEKA Stainless Steel Valves are widely used in chemical process industries, hydraulic power equipment, thermal power plants, petrochemical industries, cryogenic processes for liquid air separation as well as in cryogenic high pressure gas purification.

WEKA Stainless Steel Valves are the preferred choice for applications involving temperatures extremes (down to $-250\text{ }^{\circ}\text{C}$, up to $+240\text{ }^{\circ}\text{C}$ or higher) and high pressures (up to 700 bar).

- **Completely manufactured with stainless steel**
- **Easy fine-tuning also under extreme pressure**
- **Adjusted flow rate remains constant at all times**
- **No jamming of the spindle thread possible**
- **Adjustable sealing**
- **Always pressure and air tight with pivotable conical seat plug**
- **Free choice of connection type**

1 Choice of process connections:

- butt weld end
- female thread ISO 7-1 or ISO 228-1 (cylindrical), NPT ANSI B1.20.1 (conical)
- male thread ISO 7-1 (conical), ISO 228-1 (cylindrical), NPT ANSI B1.20.1 (conical)

2 Spindle sealing with PTFE roof-collar seals and graphite box-packing for high temperature operation. Bellows-sealed valves also included in the standard product range

3 Execution with bellows-sealing for clean gases or cryogenic liquids


4 Pivoting conical seat plug and seat (both metallic) ensure leak-tight shut-off


5 Hand wheels ergonomically designed for Operator comfort. Thermoset polymer, or aluminium/stainless steel for high temperature applications

■ All parts with media contact made of stainless steel (316&316L)

■ Low maintenance design of manual drive. Spindle thread isolated from process media.


■ Controlled batch production (heat number batch production) including material certificate upon request.

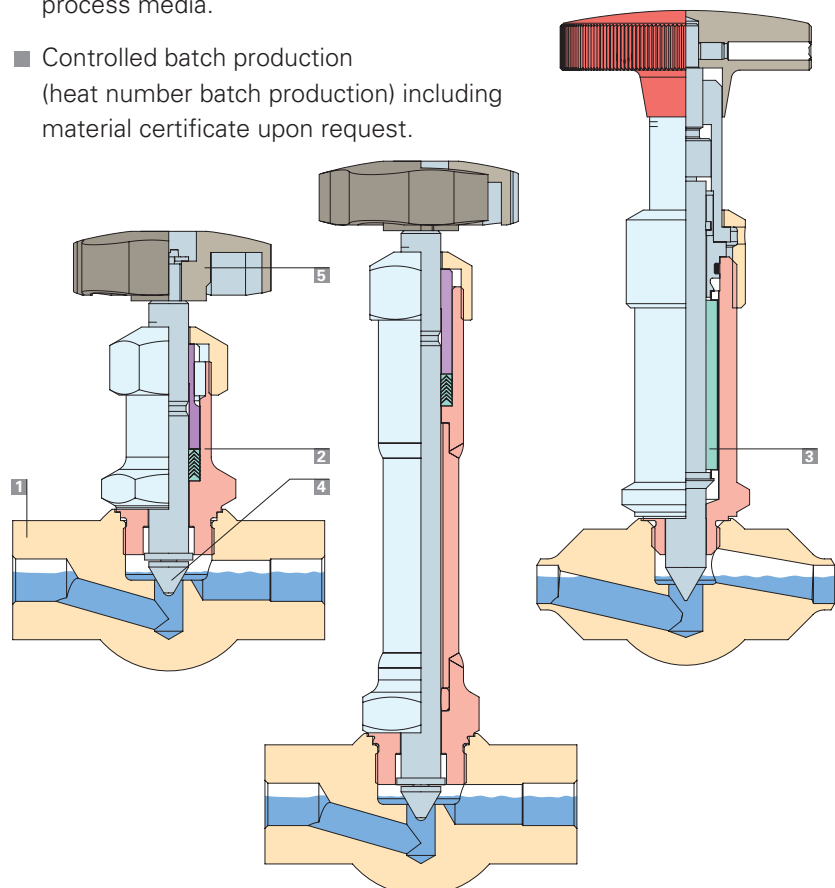

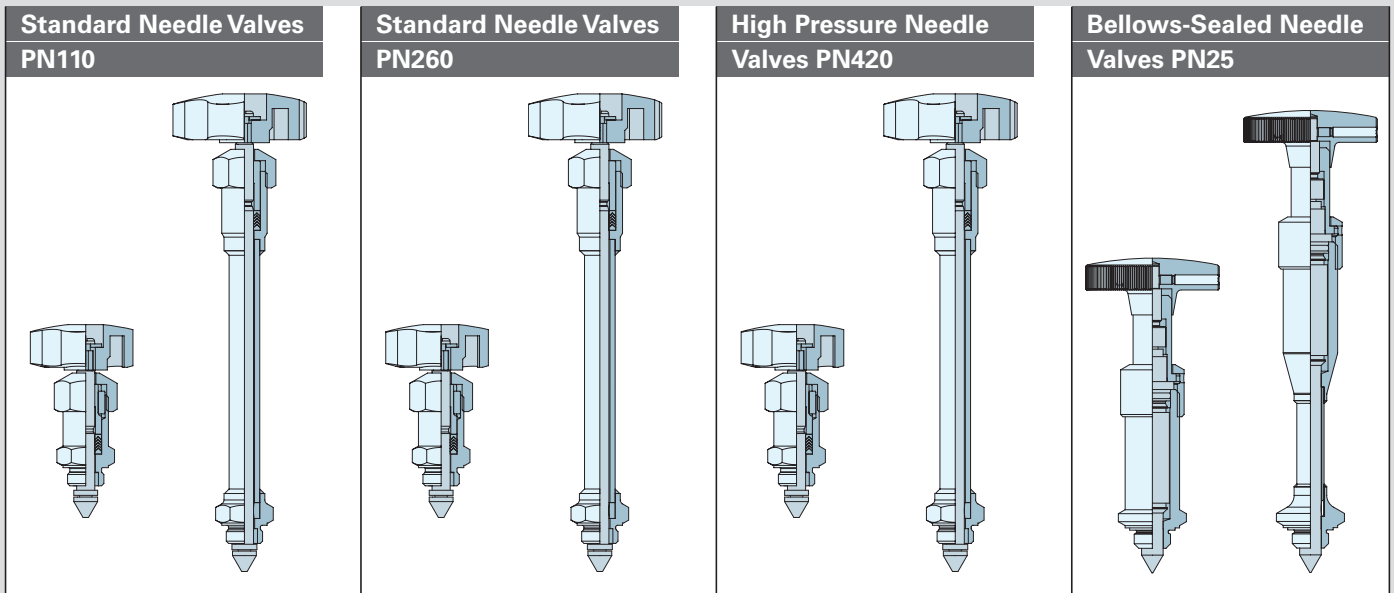

Operating temperature from -60 °C up to +240 °C resp. from -250 °C up to +240 °C with stem extension

Process connections



Pipe diameter DN4 to DN15

Nominal pressure up to 110 bar	Nominal pressure up to 260 bar	Nominal pressure up to 420 bar	Nominal pressure up to 25 bar
--	--	--	---


<p>These standard needle valves are suitable for a wide field of applications. The use of valves with stem extension is recommended for low temperatures down to -250 °C (e. g. for use with liquefied gases).</p>	<p>Upon special request we manufacture valves with operating pressure ratings up to 700 bar.</p>	<p>Higher pressure is possible with special bellows-sealing.</p>
--	--	--

Materials

Standard: A4 stainless steel, particularly Type Nr. 1.4401 & 1.4404 (X5CrNiMo17-12-2 & X2CrNiMo17-12-2) or 316&316L.
 Optional: stainless steel, e. g. No. 1.4435 or 1.4571 (316Ti) or 1.4541 (321), 1.4301&1.4307 (304&304L) and high grade corrosion-resistant stainless steel e. g. No. 1.4539 (X1NiCrMoCu25-20-5) 904L or 254 SMO.
 Custom-built: Titanium (pure titanium or Titanium alloy), Hastelloy® (Types C-22/C276; B-2), Monel®, Inconel® or Incoloy®.

Modular design principle

Due to the modular design principle our valves can be built according to your specifications.

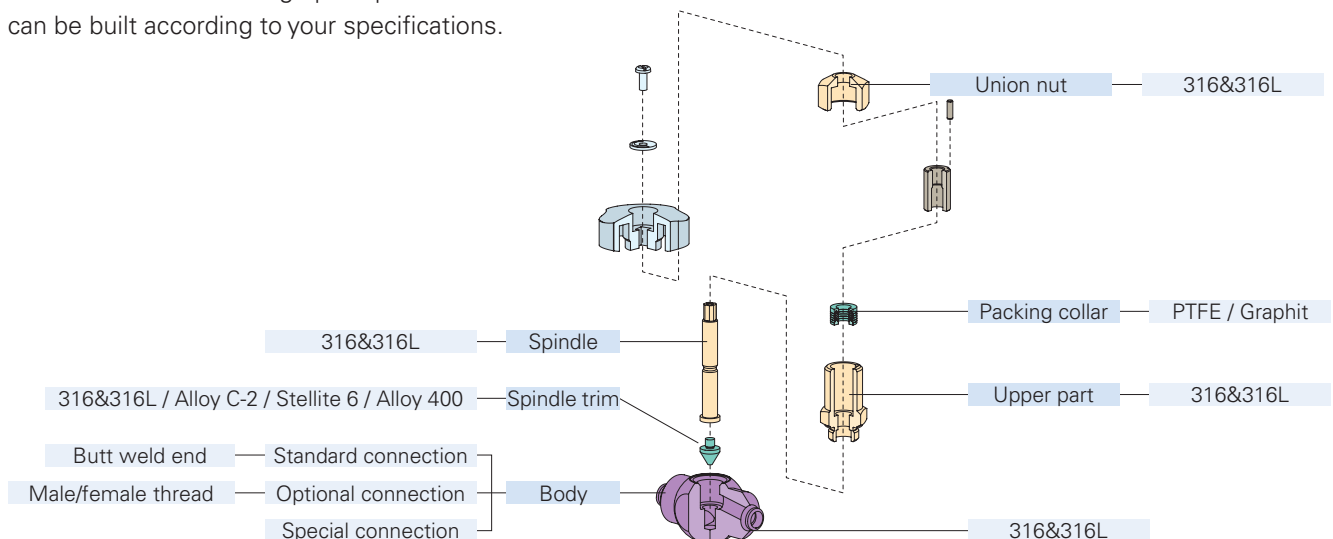

Valves and Cryogenic Components

Control and shut-off valves
Check valves
Safety valves
Transfer line couplings
Flow meters
Ejectors




Certified according
ISO 9001

Certified according
PED

Certified according
ATEX/IECEX

Level Measurement

Bypass Visual Level Indicators
Top of Tank Visual Level Indicators
In-Tank Tank Level Indicators

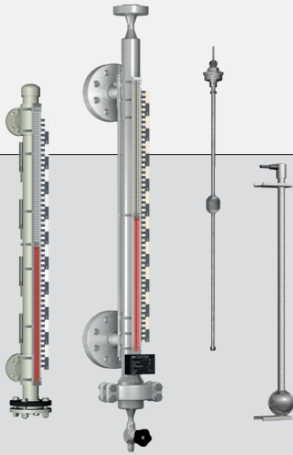

Services

Engineering, development and project management
Service and Support



**WEKA AG, Schürlistrasse 8
CH-8344 Bäretswil, Switzerland
Phone +41 43 833 43 43
info@weka-ag.ch · www.weka-ag.ch**

Member of the **ARCA** Group
FLOW